

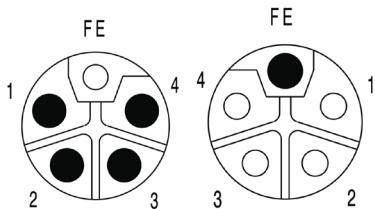
Technical change to M12 L-coded

Dear Madam or Sir,

the products listed below are subject to a product change and will be supplied in a modified revision. Please pass this product information on to your employees and, if needed, to your customers. All modifications mentioned have been made to support our ongoing commitment to continual improvement and ongoing product development.

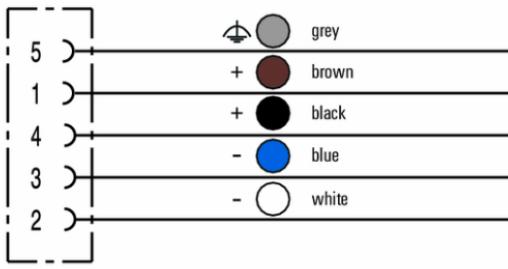
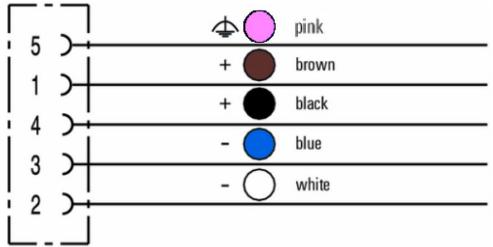
1. Initial situation

For M12 L-coded cord sets, the wire colour of the functional earth (Pin5) is grey.



2. Technical change

The wire colour of the functional earth (Pin5) changes from grey to pink.

Old version	New version																				
 <table><tr><td>5</td><td>grey</td></tr><tr><td>1</td><td>brown</td></tr><tr><td>4</td><td>black</td></tr><tr><td>3</td><td>blue</td></tr><tr><td>2</td><td>white</td></tr></table>	5	grey	1	brown	4	black	3	blue	2	white	 <table><tr><td>5</td><td>pink</td></tr><tr><td>1</td><td>brown</td></tr><tr><td>4</td><td>black</td></tr><tr><td>3</td><td>blue</td></tr><tr><td>2</td><td>white</td></tr></table>	5	pink	1	brown	4	black	3	blue	2	white
5	grey																				
1	brown																				
4	black																				
3	blue																				
2	white																				
5	pink																				
1	brown																				
4	black																				
3	blue																				
2	white																				

3. Reason for change

The scope of this change is a result of an update to standard DIN EN 60445 (VDE 0197):2018-02 EN 60445:2017. The update will result in a change from a grey to pink wire color for FE (functional earth).

4. Availability

The changeover will start in Q3 2020, in the following months there may be mixed deliveries.

5. Affected parts

Only M12 power cord sets with L-coding are affected by the change.

245520XXXX	SAIL-M12BW-L-X.XPGR
245522XXXX	SAIL-M12G-L-X.XPGR
245524XXXX	SAIL-M12W-L-X.XPGR
245526XXXX	SAIL-M12GM12G-L-X.XPGR
245528XXXX	SAIL-M12GM12W-L-X.XPGR
245530XXXX	SAIL-M12WM12W-L-X.XPGR
245532XXXX	SAIL-M12WM12G-L-X.XPGR
245533XXXX	SAIL-M12BG-L-X.XPGR

6. Data

Possible Content:

- Product change notification number:	PCN-PB46-20200708-00-A
- date of publishing:	13. July 2020
- revision number:	A

We hope that the changes will benefit your business and will not affect you in any significant way and apologise in case of any inconvenience caused. Please rest assured that we will do everything possible to achieve this product change as smoothly as possible with minimum or no business disruption.

For further questions or if you need any additional assistance or information, please contact your local sales office directly. All contacts for sales representatives are available here: <http://www.weidmueller.com/contact>

Details of this and any other product changes can also be found on our web page by following the link shown below

<http://www.weidmueller.com/int/service/online-support-and-downloads/product-change-notification>

Best regards

Product Management

Weidmüller Interface GmbH & Co. KG
Klingenbergsstraße 26, 32758 Detmold, Germany

Weidmüller – Your partner in Industrial Connectivity
We look forward to sharing ideas with you – **Let's connect.**