


Guide for EM220 TCP firmware update


Update the firmware from V2 to V3 in the webpage



- 1) Power up the EM220 device and connect to PC with Ethernet cable.
- 2) Enter the IP webpage with IP address (Default: 192.168.1.200).

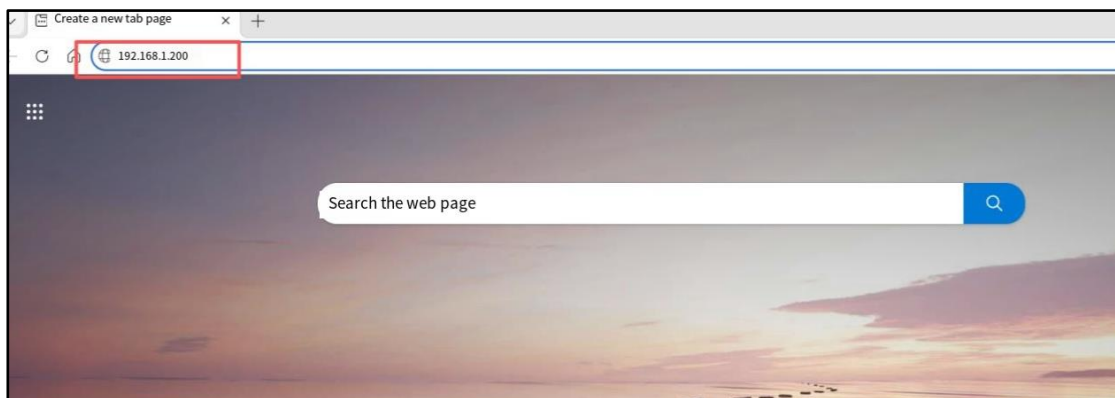



- 3) Login with username and password (Default: Username: admin, Password: admin).

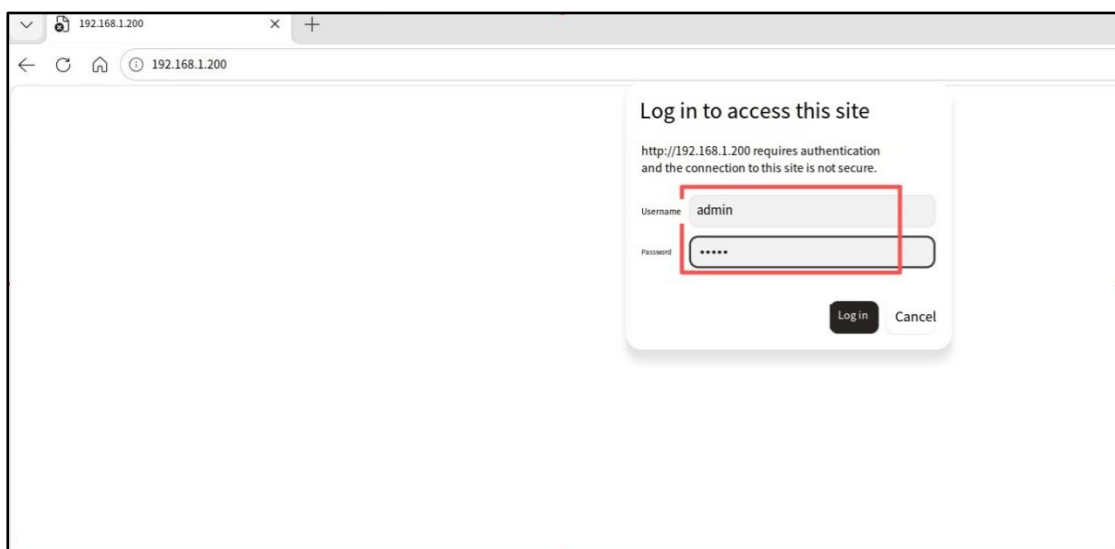

Guide for EM220 TCP firmware update

Update the firmware from V2 to V3 in the webpage

- 4) Open **Others** subpage and then press **Select file** to choose the new-version firmware.
- 5) Press **Start** to upload the selected firmware.

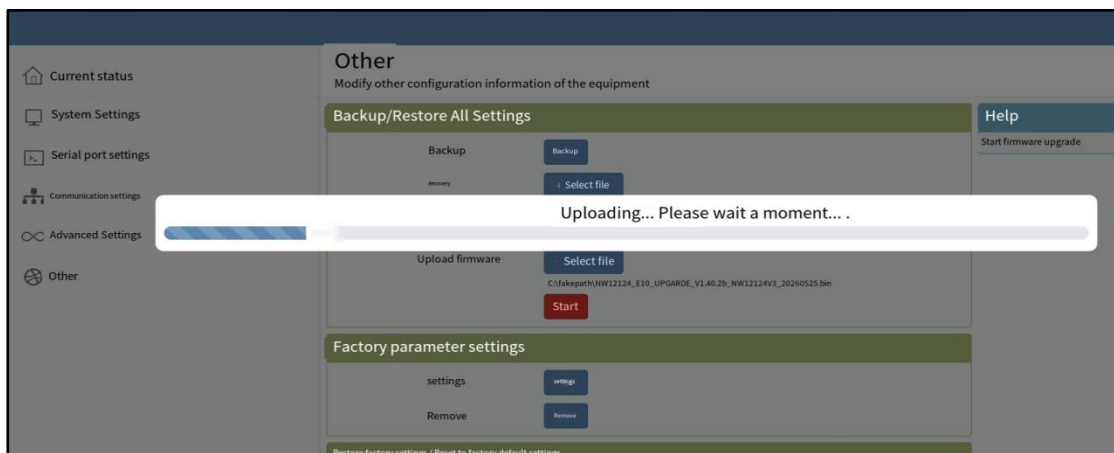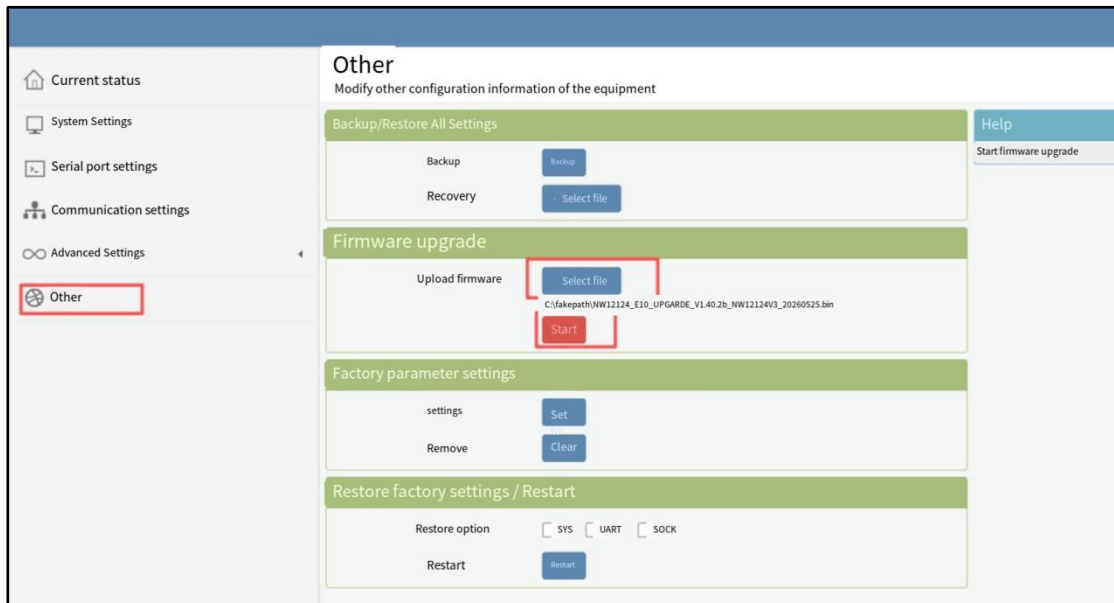


- 6) Once completed, the webpage will refresh automatically.

Guide for EM220 TCP firmware update

Update the firmware from V2 to V3 in the webpage

- 7) Check the latest firmware version in Current Status subpage, the description should be V1.40.2b_NW12124V3.

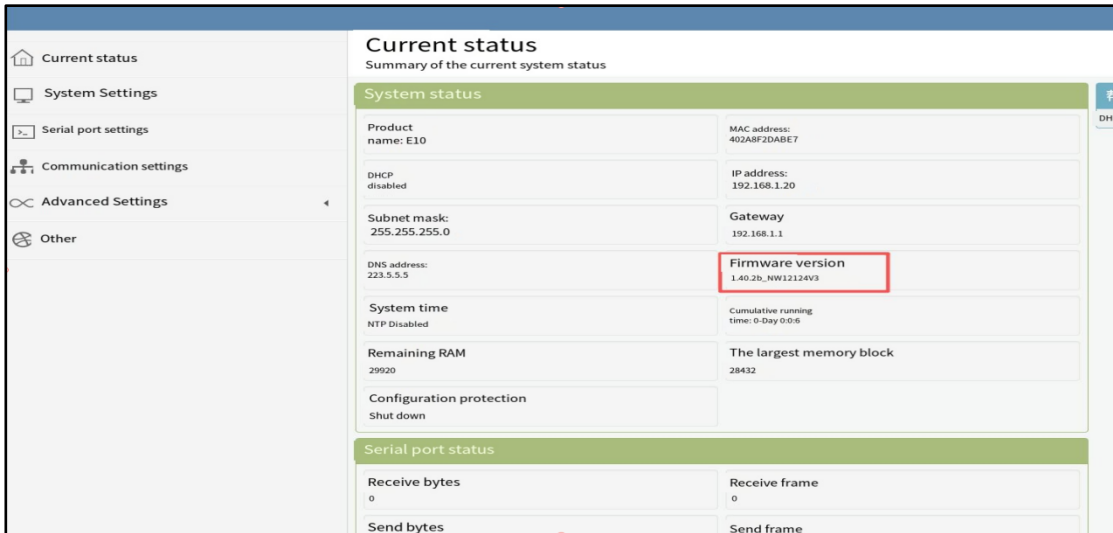

Current status Summary of the current system status	
System status	
Product name: E10	MAC address: 402A8F2DABE7
DHCP disabled	IP address: 192.168.1.20
Subnet mask: 255.255.255.0	Gateway: 192.168.1.1
DNS address: 223.5.5.5	Firmware version: 1.40.2b_NW12124V3
System time: NTP Disabled	Cumulative running time: 0-Day 0:0:6
Remaining RAM: 29920	The largest memory block: 28432
Configuration protection: Shut down	
Serial port status	
Receive bytes: 0	Receive frame: 0
Send bytes	Send frame

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

32758 Detmold

Phone +49 (0) 5231 14-0

Fax +49 (0) 5231 14-292083

E-Mail info@weidmueller.com

Internet www.weidmueller.com