


HOLE PATTERN

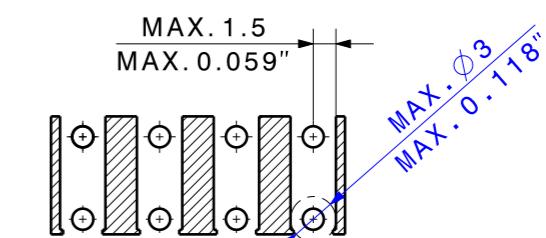

PASTE-FREE AREA

 $P = 5.08$

SHOWN: LSF-SMT 5.08/04/180

For the mounting on PCBs, it should be noted that the rated data relates only to the PCB components alone.

The necessary creepage and clearance paths must be observed in the relevant equipment standards in accordance with IEC 664 / VDE 0110.

The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3.

Weidmüller PCB components are rated in accordance with the DIN EN 61984 standard, and are valid for its field of application.

If the components are used in accordance with the intended purpose, the components will meet all requirements with respect to the occurrence of electrical, mechanical, thermic and corrosive stress.

DIN ISO 2768-m		Cat. no.:	
	98688/5 23.10.17 HELIS_MA	00	
Modification			
	Date	Name	
Drawn	22.06.2004	SEIDEL_T	
Responsible		KRUG_M	
Scale: 5/1	Checked	01.11.2017	HELIS_MA
Supersedes: .	Approved		HECKERT_M
Product file: LSF-SMT		7358	

Weidmüller

3 34084 15

Drawing no. 04 of 07 sheets

LSF-SMT .../.../180...TU
LEITERPLATTENKLEMME
PCB TERMINAL