


MASSE OHNE TOLERANZ SIND KEINE PRUEFFMASSE
DIMS. WITHOUT TOLERANCE ARE NOT CONTROL DIMS.

DIE DEUTSCHE VERSION IST VERBINDLICH
THE GERMAN VERSION IS BINDING

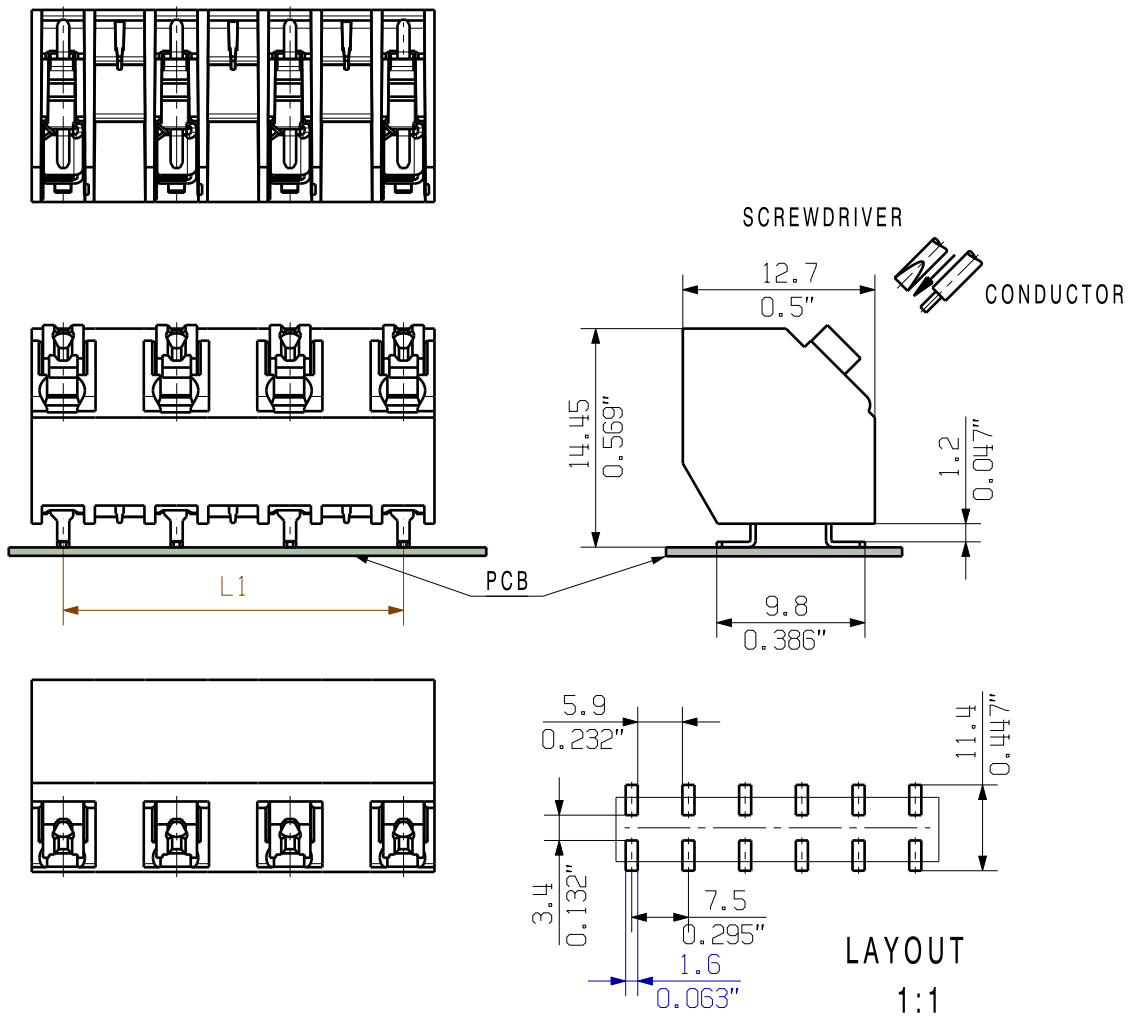

For the mounting on PCBs, it should be noted that the rated data relates only to the PCB components alone.

The necessary creepage and clearance paths must be observed in the relevant equipment standards in accordance with IEC 664 / VDE 0110.

The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3.

Weidmüller PCB components are rated in accordance with the DIN EN 61984 standard, and are valid for its field of application.

If the components are used in accordance with the intended purpose, the components will meet all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress.

SHOWN: LSF-SMD 7.50/04/135...

6	37,5	1,476
5	30,0	1,181
4	22,5	0,886
3	15,0	0,591
2	7,5	0,295
n	L1 [mm]	L1 [Inch]



DIN ISO 2768-m

78009/5
09.09.14 HELIS_MA 00

MODIFICATION



DRAWN 11.02.2014 HELIS_MA

RESPONSIBLE KRUG_M

CHECKED 30.09.2014 HELIS_MA

APPROVED LANG_T

Weidmüller

CAT.NO.: **C 58004 00**

DRAWING NO. ISSUE NO.
SHEET 01 OF 02 SHEETS

LSF-SMD 7.50/.. /135...
LEITERPLATTENKLEMM
PCB TERMINAL

SCALE: 2:1

SUPERSEDES: .

PRODUCT FILE: LSF-SMD 3.50

7358