
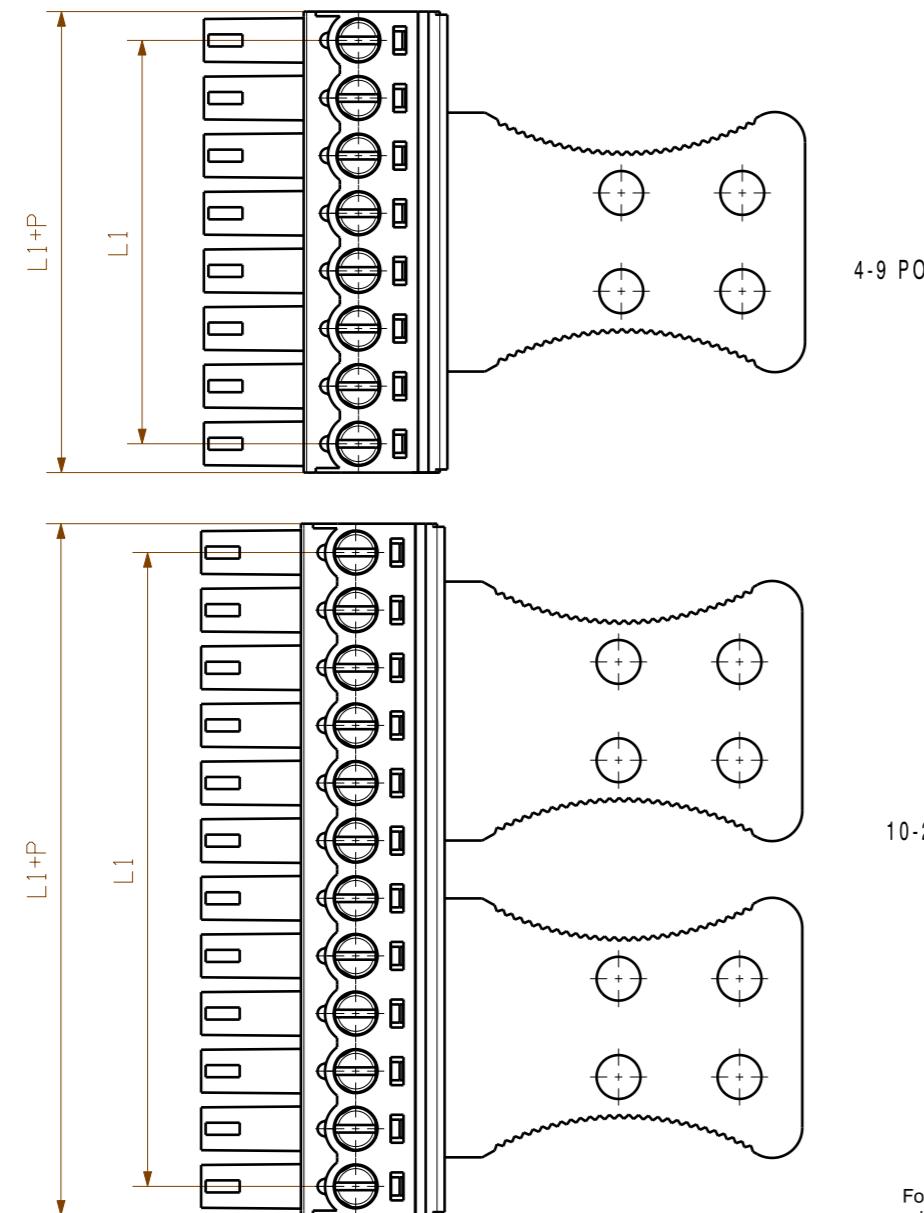


⑩

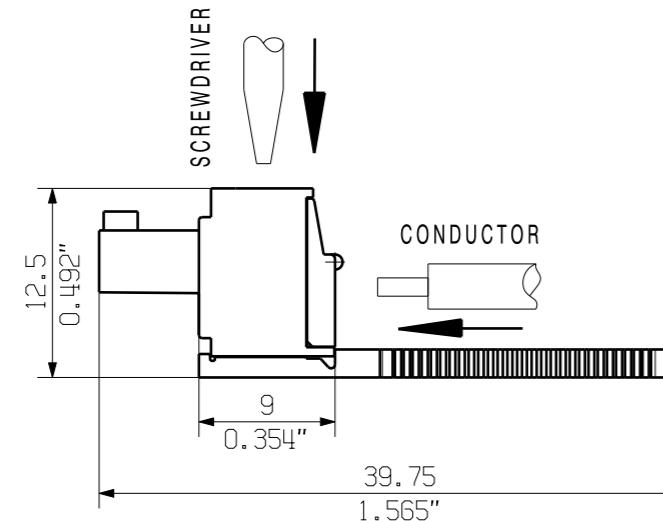

For the mounting of PCBs, it should be noted that the rated data given in the catalogue relates only to the connection elements. The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to VDE 0110. The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller connectors are tested to the DIN VDE 0627 standard, and are valid for its field of application. Provided that the connectors are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

KUNDENZEICHNUNG
CUSTOMER DRAWING

GENERAL TOLERANCE: DIN ISO 2768-m		.	
98178/5 16.10.17 MA_J		01	.
RoHS COMPLIANT		Max. nos.	.
		Modification	
		Date	Name
		Drawn	21.02.2006 GU_D
		Responsible	MA_J
Scale: 2/1		Checked	16.10.2017 ZHOU_N
Supersedes: .		Approved	XU_S
		Product file: BCZ 3.81	

Weidmüller 

C 40383 10

Drawing no. Sheet 03 of 06 sheets

BCZ 3.81/.../180ZE SN ...
BUCHSENLEISTE
SOCKET BLOCK

7070