

8000093503 PV combiner box thermal report**PV 216S0F3CXXV0O0TAPA15LWW****INPUT DATA**

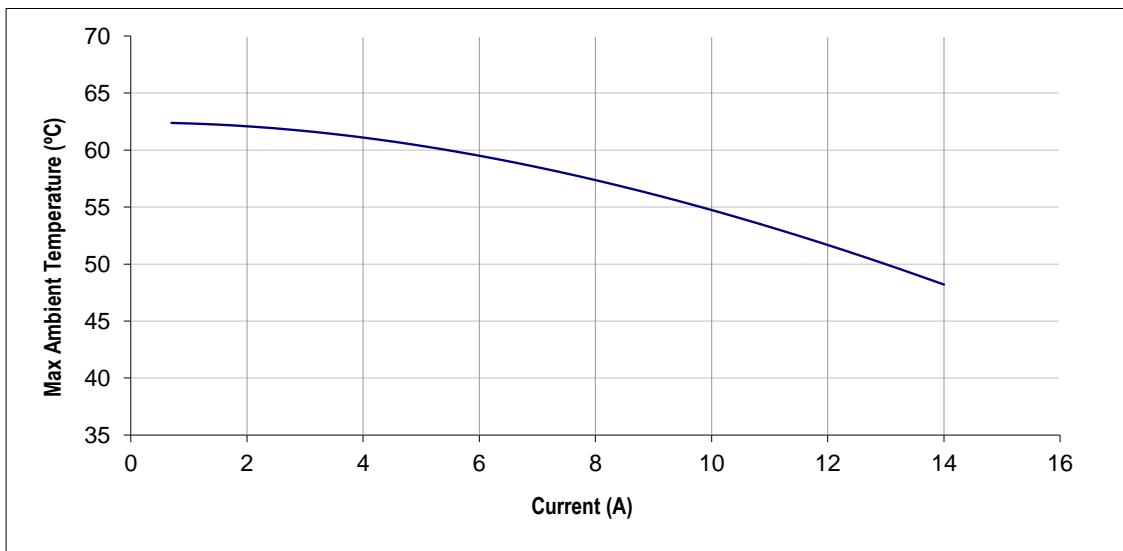
Enclosure model	536 x 747 x 300 mm
Number of MPPT	1
Switch-disconnector model (per MPPT)	400A 1500V
Maximum current (per MPPT)	224 A
Number of inputs (per MPPT)	16
Fuse-link model	25A gPV 1500V 10x85mm
Number of monitoring devices (per MPPT)	0
Type of mounting	Against wall, all other sides detached
Maximum allowed internal temperature	70 °C
Combined inputs	1
Height (A)	536 mm
Width (B)	747 mm
Depth (C)	300 mm
Effective cooling surface A_e of the enclosure	1.16 m ²

RESULTS

Ambient temperature (no direct sunlight)	35 °C
Rated current per input at 35°C	14.00 A
Power dissipated by components (except wiring)	58 W
Power dissipated by wiring	14 W
Total dissipated power	72 W
Temperature rise, mid height	18 °C
Temperature rise, top	22 °C
Internal temperature, top	57 °C

CURRENT RATINGS

At 35°C	14.00 A
At 40°C	14.00 A
At 45°C	14.00 A
At 50°C	12.99 A

**NOTES**

Thermal report based on IEC TR 60890 ed2.0

Thermal report does not include the direct sunlight effects