

Product launch note

TFI-SERIES

Compact timing relays for building and factory automation


Timing relays fulfil many functions in industrial environments. In automation technology, they are used to compensate for errors caused by high clock rates. Timing relays extend short pulses so that downstream control components can reliably detect them.

Our new timing relay portfolio includes five different devices: Multifunction, star-delta switch, clock generator, on-delay, and off-delay. They cover the most critical applications in building and factory automation.



Your special advantages:

- **Simple configuration via rotary switches**
Timing functions and time ranges are configured utilising rotary switches on the front of the devices.
- **According to the requirements of EN 61812**
The devices comply in design and function with the international standard for timing relays according to EN 61812.
- **With cULus listing for USA and Canada**
All timing relays have a cULus listing for use in the North American market, without any problems.



Visit our website
for more information

Let's connect.

Off-delay



General Data

Installation design	
Rated control voltage	24 - 240 V UC
Continuous current	8 A
Connection	screw connection
Contact type	1 changeover
Dimensions (W x H x D)	17.5 x 87 x 60 mm

Functions

R	Off-delay with control input
---	------------------------------

Status displays

LED green (U/t)	Flashes when time runs
LED yellow (R)	Lights permanently with supply voltage is applied
	Relay closed

Time ranges


0.05 s - 1 s
0.5 s - 10 s
3 s - 60 s
30 s - 10 min
3 min - 1 h
30 min - 10 h
5 h - 100 h

Ordering Data


TFIS 24-240VUC 1CO OFFC

Order No.

2697290000

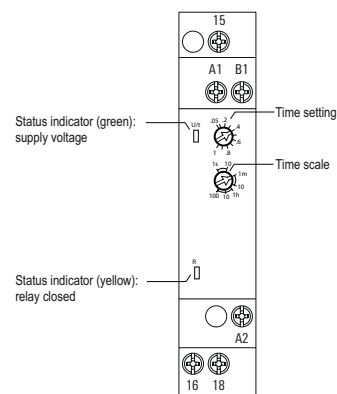

R Off-delay with control input



Off-delay with control input (R)

The supply voltage U must be constantly applied to the device. When the control contact S is closed, the output relay R switches into on-position. If the control contact is opened, the set interval t begins. After the interval t has expired the output relay switches into off-position. If the control contact is closed again before the set interval has expired, the interval already expired is erased and is restarted with next cycle.



Visit our website
for more information

Let's connect.

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
32758 Detmold, Germany
T +49 5231 14-0
F +49 5231 14-292083
www.weidmueller.com

Personal support can
be found on our website:
www.weidmueller.com/contact

We reserve the right to make technical changes · 10/2019/TCTC