


1/1

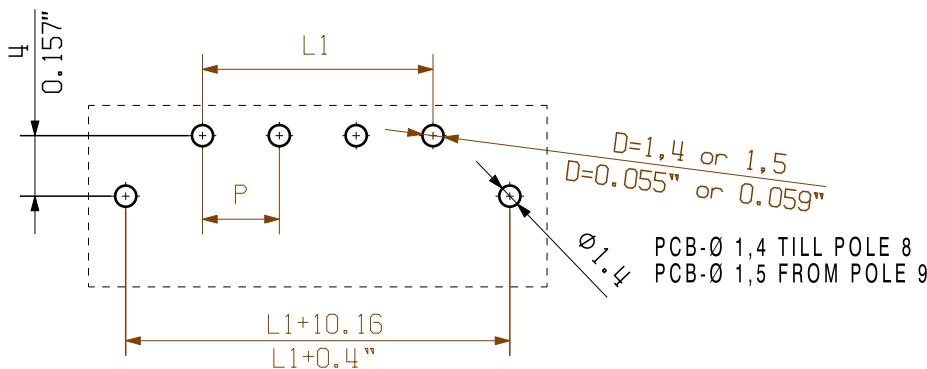

## HOLE PATTERN

For the mounting of PCBs, it should be noted that the rated data relates only to the PCB components alone.

The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 664 / VDE 0110.

The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller PCB components are tested to the DIN EN 61984 standard, and are valid for its field of application. Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

P=PITCH

SHOWN: SL 5.08HC/04/90LF

STIFTLAENGE L PIN LENGTH L	TOLERANZ TOLERANCE	
3,2	0,1	
	-0,3	
4,5	0,1	
	-0,3	
		<b>L1 [mm] L1 [inch]</b>



DIN ISO 2768-m

101482/5  
07.02.18 HELIS\_MA 01

Modification

Drawn 18.10.2010 HERTEL\_S

Responsible HERTEL\_S

Scale: 2:1

Checked 27.02.2018 HELIS\_MA

Supersedes: .

Approved LANG\_T

**Weidmüller**

**3 48753 04**  
Drawing no. 05 of 05 sheets

**SL 5.08HC/..../90...**  
STIFITLEISTE  
MALE HEADER

Product file: SL-HP 5.08

7377