
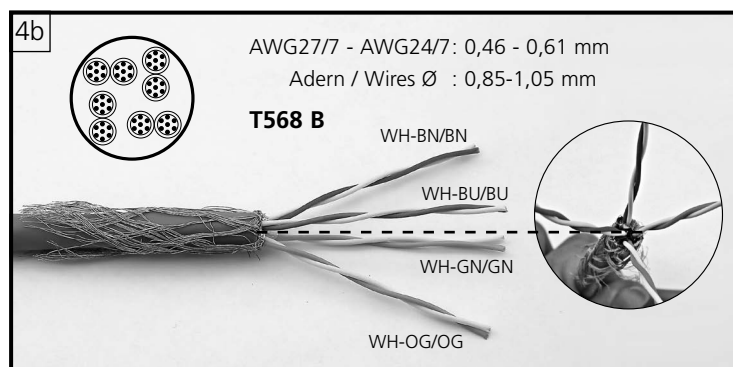
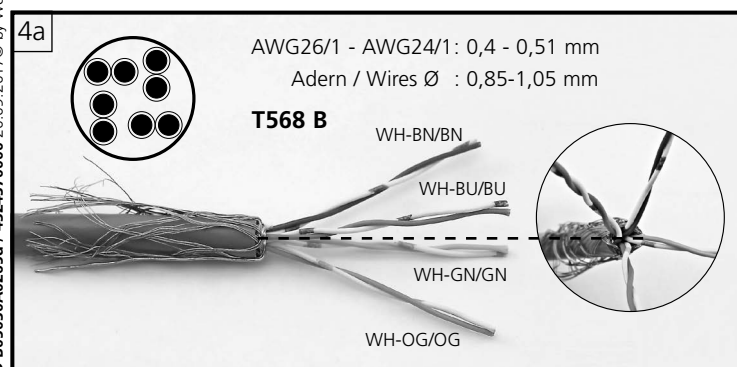
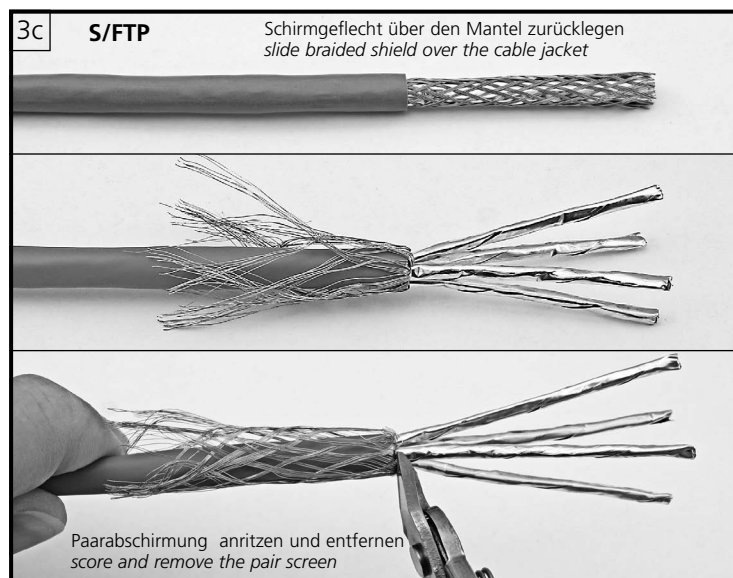
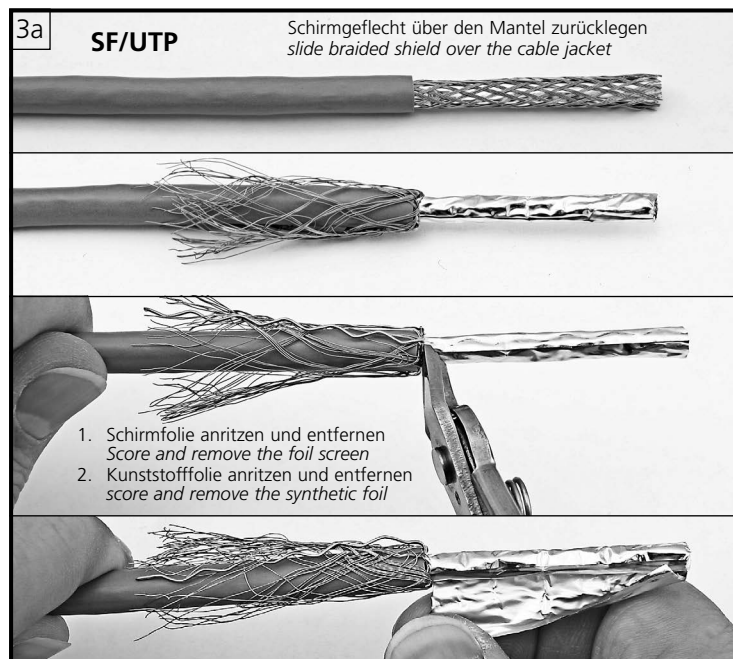
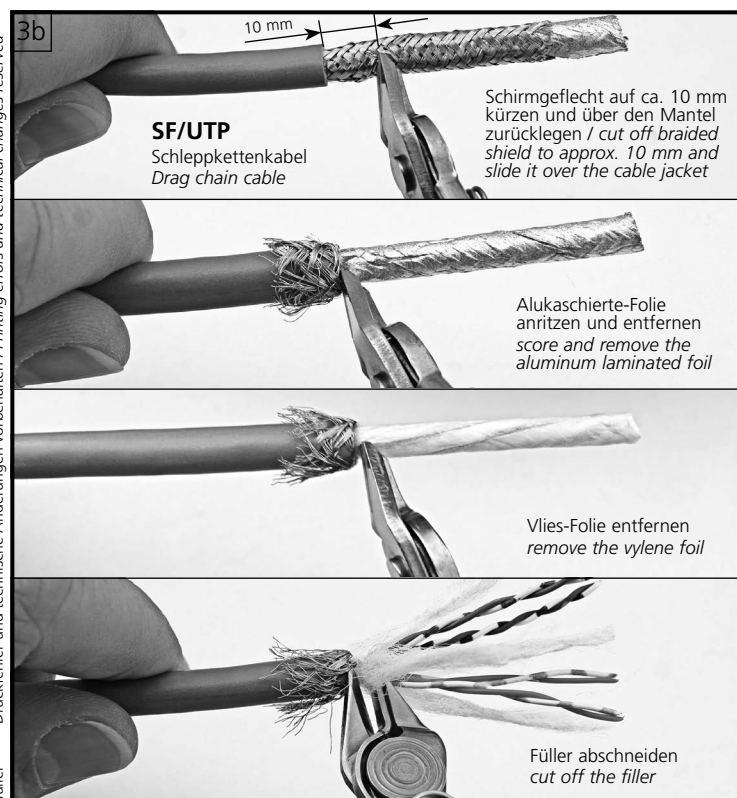
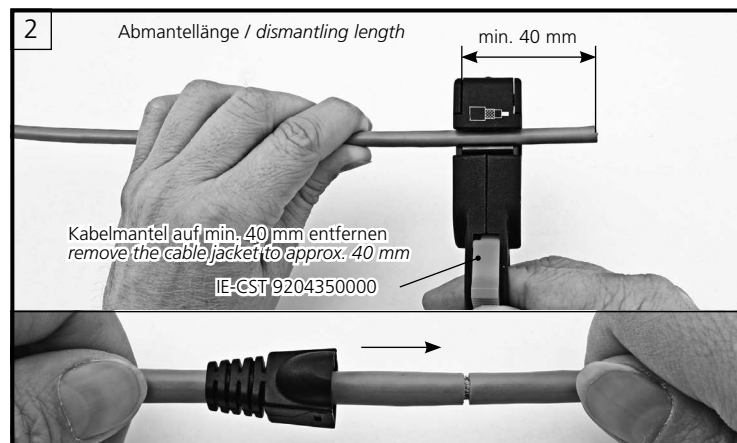
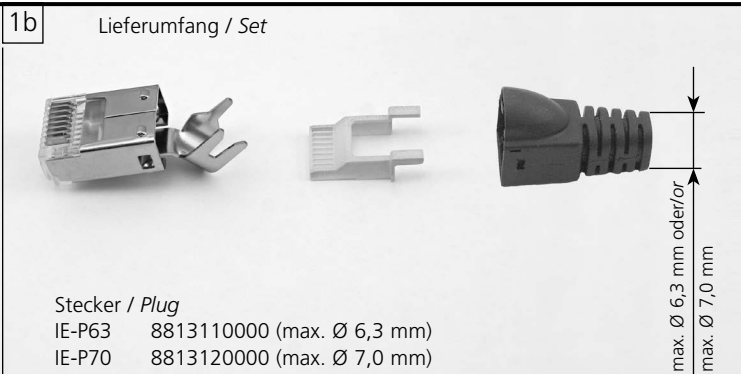


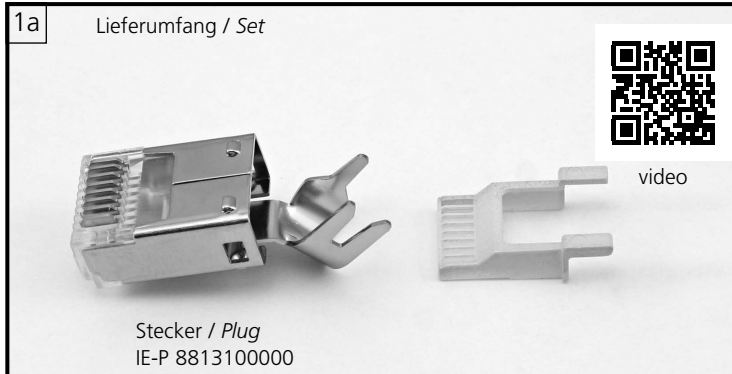

Anschlussbelegung / PIN assignments

RJ45 PIN Nr./No.	Farbcode Colour code T568		DIN 47100	Indus- trial
	A	B		
1	WH-GN	WH-OG	WH	YE
2	GN	OG	BN	OG
3	WH-OG	WH-GN	GN	WH
4	BU	BU	YE	-
5	WH-BU	WH-BU	GY	-
6	OG	GN	PK	BU
7	WH-BN	WH-BN	BU	-
8	BN	BN	RD	-

Verbindung / Connection

1:1	crossover
1-1	1-3
2-2	2-6
3-3	3-1
4-4	4-7
5-5	5-8
6-6	6-2
7-7	7-4
8-8	8-5

Anwendung / Application

RJ45 PIN Nr./No.	10BT/ 100BT	Gigabit Ethernet	Token Ring	ISDN/So	TP-PMD/ ATM	ISDN/ So	Upo/ TEL
1	•	•			•		
2	•	•			•		
3	•	•	•			2a	
4		•	•			1a	•
5		•	•			1b	•
6	•	•	•			2b	
7		•			•		
8		•			•		

