

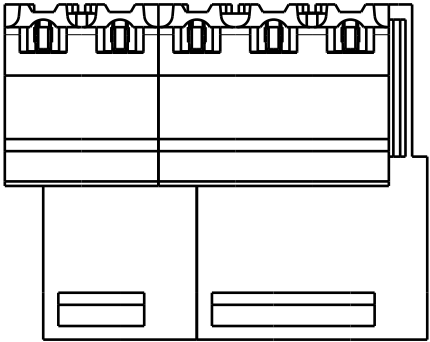


WEITERGABE SOWIE VERVIELFÄLTIGUNG DIESES DOKUMENTS, VERWERTUNG UND MITTEILUNG SEINES INHALTS SIND VERBOTEN, SOWEIT NICHT AUSDRUECKLICH GESTATTET.
ZUWIDERHANDLUNGEN VERPFLICHTEN ZU SCHADENERSATZ. ALLE RECHTE FUER DEN FALL DER PATENT-, GEBRAUCHSMUSTER- ODER GESCHMACKSMUSTEREINTRAGUNG VORBEHALTEN.
THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED.
OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. WEIDMUELLER EXCLUSIVELY RESERVES THE RIGHT TO FILE FOR PATENTS, UTILITY MODELS OR DESIGNS.


© WEIDMUELLER INTERFACE GmbH & Co.KG

MASSE OHNE TOLERANZ SIND KEINE PRUEFMASSE
DIMS. WITHOUT TOLERANCE ARE NOT CONTROL DIMS.

DIE DEUTSCHE VERSION IST VERBINDLICH
THE GERMAN VERSION IS BINDING

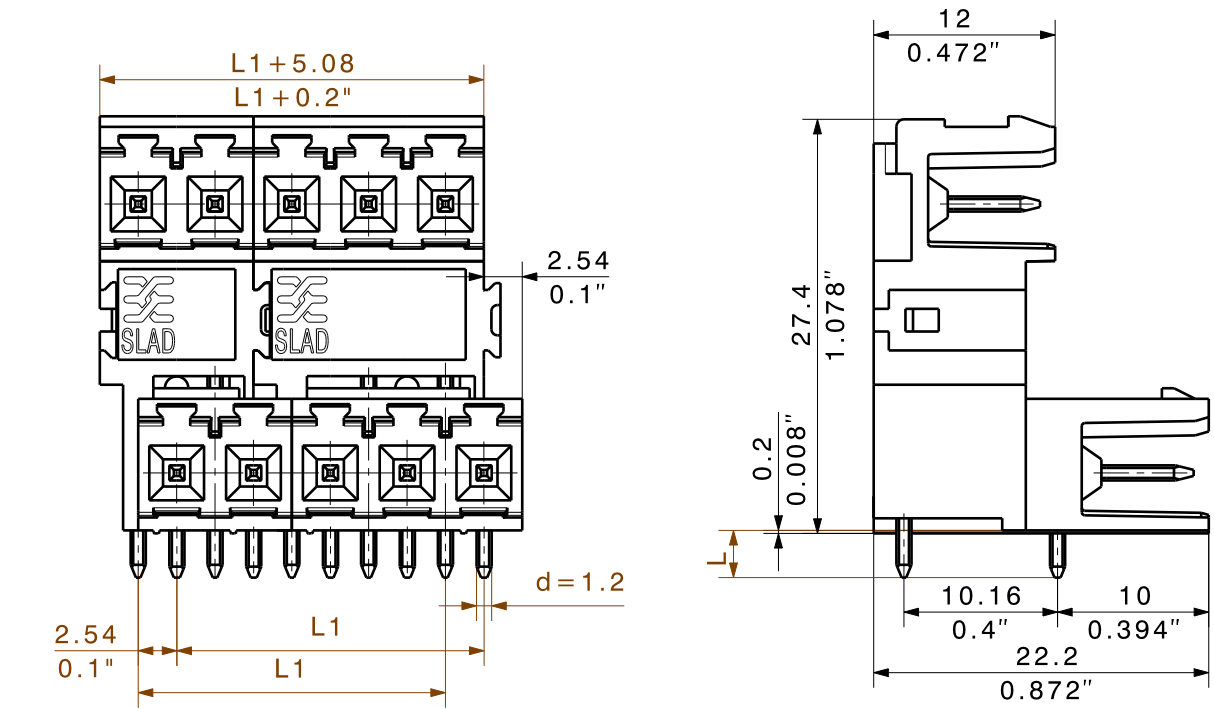

1/1

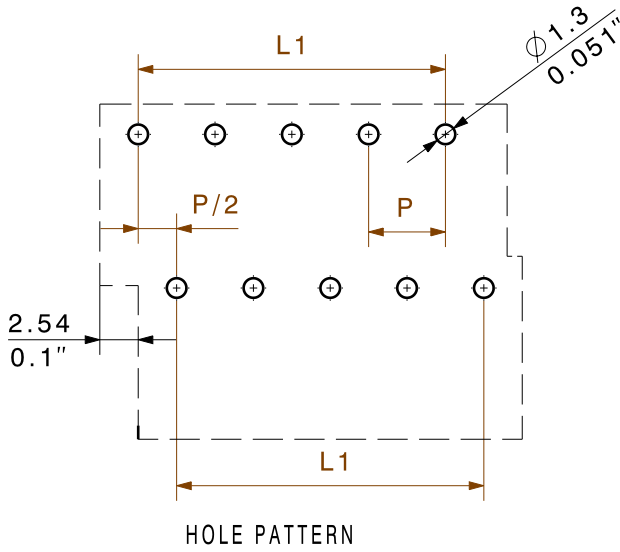

P = PITCH
SHOWN: SLAD 5.08/10/90

For the mounting of PCBs, it should be noted that the rated data relates only to the PCB components alone.
The necessary creepage and clearance paths must be observed in connection with the respective applicant in accordance to IEC 664 / VDE 0110.
The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3 very fine.

Weidmüller PCB components are tested to the DIN EN 61984 standard, and are valid for its field of application.
Provided that the components are used to the intended purpose, all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress will be satisfied.

3,2	0,1 -0,3	48	116,84	4,600
4,5	0,1 -0,3	46	111,76	4,400
PINLÄNGE L PIN LENGTH L	TOLERANZ TOLERANCE	44	106,68	4,200
n	L1 [mm] L1 [Inch]	42	101,60	4,000
		40	96,52	3,800
		38	91,44	3,600
		36	86,36	3,400
		34	81,28	3,200
		32	76,20	3,000
		30	71,12	2,800
		28	66,04	2,600
		26	60,96	2,400
		24	55,88	2,200
		22	50,80	2,000
		20	45,72	1,800
		18	40,64	1,600
		16	35,56	1,400
		14	30,48	1,200
		12	25,40	1,000
		10	20,32	0,800
		8	15,24	0,600
		6	10,16	0,400
		4	5,08	0,200

METRIC TOLERANCES:
X. = ± 0.3
X.X = ± 0.1
X.XX = ± 0.05

55213/0
21.12.10 HERTEL_S

01

MODIFICATION

DRAWN

29.04.2010

HECKERT_M

RESPONSIBLE

HECKERT_S

CHECKED

21.12.2010

HERTEL_S

APPROVED

HECKERT_M

SCALE: 2/1
SUPERSEDES: .

CAT.NO.: .

C 22644 **06**

DRAWING NO. SHEET 01 OF 02 SHEETS

SLAD ../90(B)
STIFTFLEISTE
PIN HEADER

PRODUCT FILE: SLAD 7299