Configuration SWU: CmpRedundancy FilePath

Content

1 Purpose 3
2 Usage 4
2.1 Preconditions 4
2.2 Installation 4
2.3 Post-Installation 5

Contact
Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
32758 Detmold, Germany
www.weidmueller.com

For any further support please contact your local sales representative:
https://www.weidmueller.com/countries

1 Purpose

The introduction of the SystemBus in redundancy applications requires the SystemBus configuration to be synchronized between PLC1 and PLC2.

The provided SWU package applies an additional configuration to the CODESYS runtime that enables the redundancy component to synchronize the SystemBus configuration between both controllers.

Without this configuration, SystemBus settings are not included in the redundancy synchronization process.

2 Usage

2.1 Preconditions

The following prerequisites must be fulfilled before installing the SWU package:

- The **CODESYS Control SL for Weidmüller u-OS** app is installed on the device.
- **SWUpdate file verification** is disabled.


Navigate to:
u-OS Control Center → Software & Updates → Update & Installation → SWUpdate File Verification

Note:
By default, SWUpdate file verification is enabled. The provided SWU package is not digitally signed and will therefore be rejected if verification remains enabled.


2.2 Installation

Navigate to:
u-OS Control Center → Software & Updates → Update & Installation

Upload the provided SWU package and start the installation process.

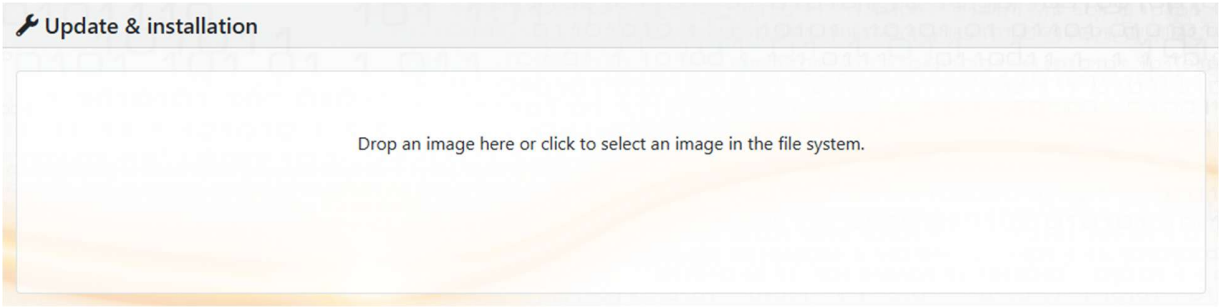

The installation progress can be monitored in the Messages log.

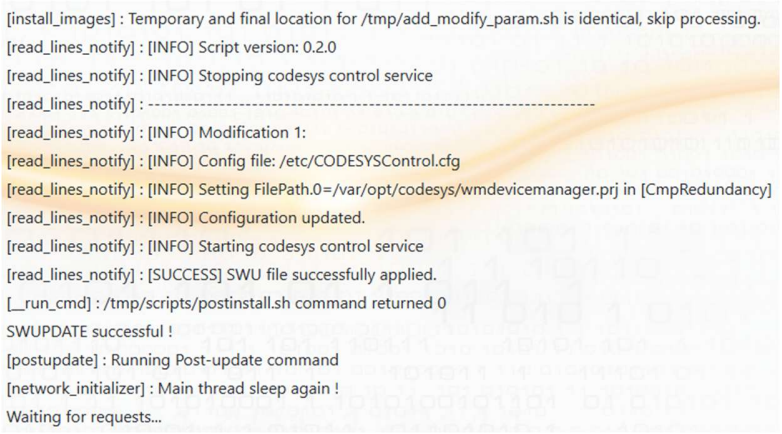

Configuration SWU: CmpRedundancy FilePath

2.3 Post-Installation

After successful installation it is recommended to re-enable **SWUpdate File Verification**.
Navigate to:
u-OS Control Center → Software & Updates → Update & Installation → SWUpdate File Verification
Enable the option again to restore the default security configuration of the device.