


Addcon adapter for migration of Schneider


Premium cards with 40P to Schneider X80

Digital cards with HE10 20P. See list of compatibility:

- TSX DEY 32D2K to BMX DDI 3202 K
- TSX DEY 64D2K to BMX DDI 6402 K
- TSX DSY 32T2K to BMX DDO 3202 K
- TSX DSY 64T2K to BMX DDO 6402 K

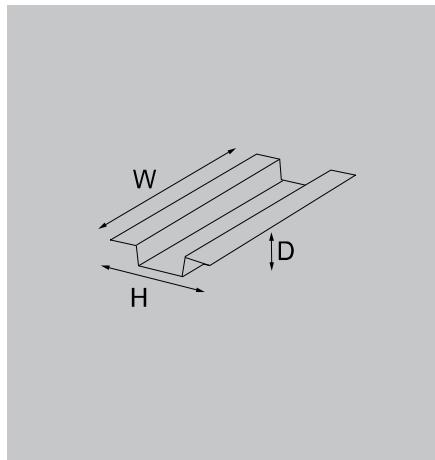

FAD ADDCON PREM-X80-VO FJ40

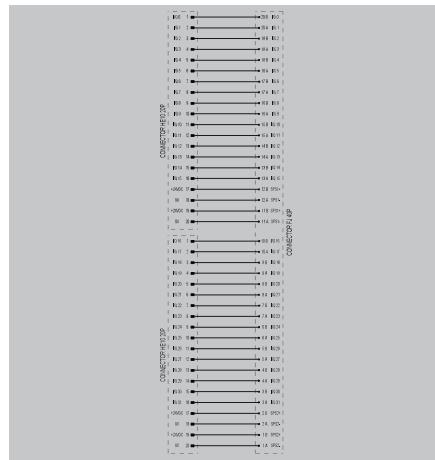

Technical data

Rated data

Max. operating input/output voltage
Max. current per channel

Max. total current

Environmental conditions

Operating ambient temperature

Max. operating humidity

Storage ambient temperature

Insulation coordination (EN 60664-1:2007)

Rated insulation voltage

Surge voltage category

Pollution severity level

Rated impulse voltage (1.2 / 50µs)

General information

Module dimensions (Height x Width x Depth)

Mounting method

IPC-A-610 Class (PCBA)

IP module rating / protection degree

Input connector

Output connector

Standard approvals

Insulation coordination for equipment within low-voltage systems

Restriction of the use of certain hazardous substances (RoHS)

RoHS 2011/65/EU – CE Certification

Note

50 ± 10% V AC / V DC

0.5 A - All channels connected

2 A per connector / 4 A per module

-40...+70 °C

85% non-condensing

-40...+70 °C

50 V AC / 70 V DC

III

2

0.8 kV AC

91.5 mm x 12.24 mm x 53.05 mm

Direct plug-in

Class 2 - Dedicated Service Electronic Products

IP 20

2 units of HE10 20P male gold plated

Compatible with the X80 cards listed in the product description

EN 60664-1:2007



EN 63000:2018

1. This product is intended to be used in fixed installations inside an enclosure or electrical cabinet with a protection degree IP 20 minimum.
2. If the equipment is used outside the specified application or ranges, the characteristics of the product may be impaired.
3. The safety of any system incorporating the equipment is in the responsibility of the assembler of the system.
4. At the end of the product service life make sure to fulfil all the relevant disposal regulations applicable for the installation location.

Ordering data

Type	Order No.
FAD ADDCON PREM-X80-VO FJ40	8000138698