


HOLE PATTERN

P = 7.62

SHOWN: LSF-SMT 7.62/04/180

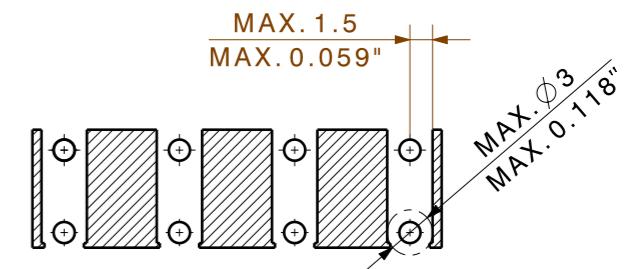

PASTE-FREE AREA

For the mounting on PCBs, it should be noted that the rated data relates only to the PCB components alone.

The necessary creepage and clearance paths must be observed in the relevant equipment standards in accordance with IEC 664 / VDE 0110.

The current-carrying capacity and pitch tolerance is to be determined according to DIN IEC 326 part 3.

Weidmüller PCB components are rated in accordance with the DIN EN 61984 standard, and are valid for its field of application.

If the components are used in accordance with the intended purpose, the components will meet all requirements with respect to the occurring of electrical, mechanical, thermic and corrosive stress.

DIN ISO 2768-m		Cat. no.:	
98688/5 23.10.17 HELIS_MA 00		3 34084 15	
Modification		Drawing no. 06 of 07 sheets	
		Date	Name
	Drawn 22.06.2004	SEIDEL_T	
	Responsible	KRUG_M	
Scale: 5/1	Checked 01.11.2017	HELIS_MA	
Supersedes: .	Approved	HECKERT_M	Product file: LSF-SMT

LSF-SMT .../.../180...TU
LEITERPLATTENKLEMME
PCB TERMINAL